


EXPLECO SCREEN REPLACEMENT


FOLLOW THE NUMBERED STEPS



EXPLECO GLS SCREEN REPLACEMENT

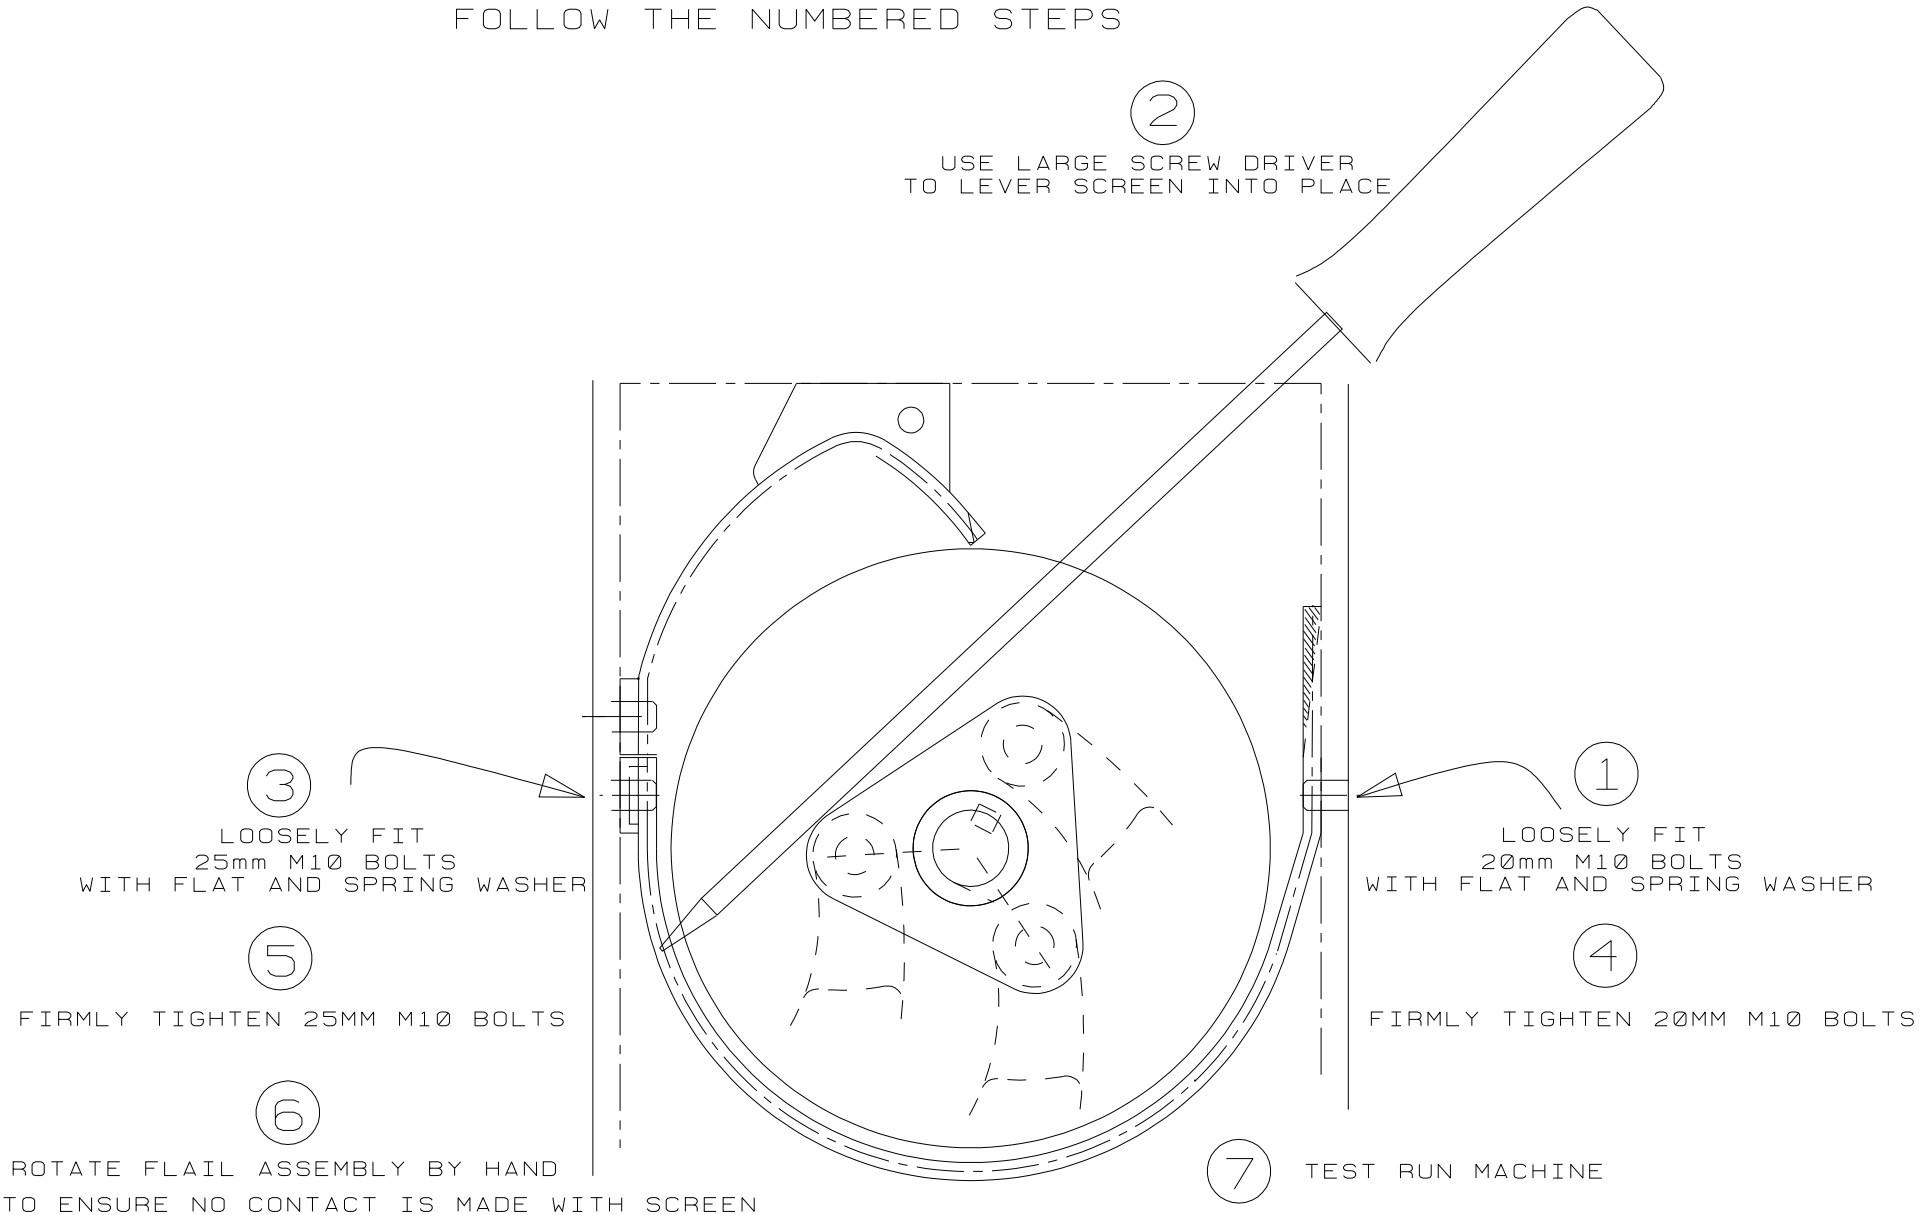

1. Check that set screws are not protruding.

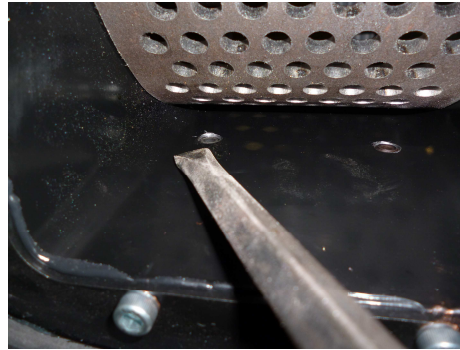


2. If set screws protruding wind the out to avoid contacting screen



3. Drive old screen down until it drops,




4. Clean glass build up from corners and faces with screwdriver

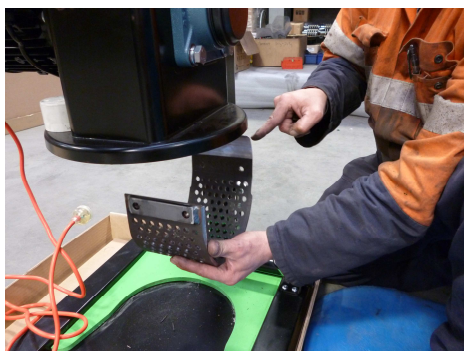

5. Locate screen so that feather edge catches in housing. With shoulder against Jack pull / spring screen so that it drops up into housing




6. Now hit screen up until it reaches bolt hole alignment.

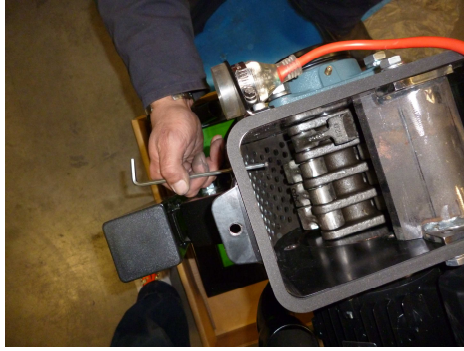

7. Use screw driver or alan key to centre bolt holes.



8. Loosely fit back two bolts 2-3 threads

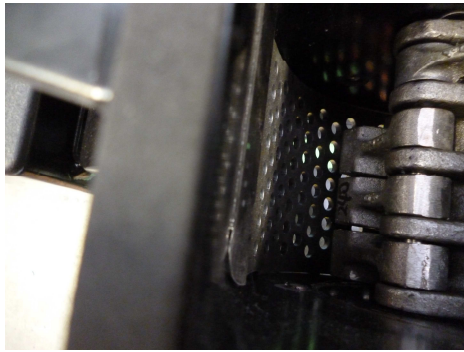

9. Then fit bolts to feather edge and tighten so that feather edge is flush. Then tight up all bolts.